

phpgw_applications		
<u>app_id</u>	integer(11)	<pk>
app_name	varchar(25)	
app_enabled	integer(11)	
app_order	integer(11)	
app_tables	text	
app_version	varchar(20)	

phpgw_preferences		
<u>preference_owner</u>	integer(11)	<pk>
preference_value	text	

phpgw_config		
config_app	varchar(50)	
<u>config_name</u>	varchar(255)	<pk>
config_value	text	

phpgw_sessions		
<u>session_id</u>	varchar(255)	<pk>
session_lid	varchar(255)	
session_ip	varchar(255)	
session_logintime	integer(11)	
session_dla	integer(11)	
session_action	varchar(255)	
session_flags	char(2)	

phpgw_nextid		
id	integer(11)	
<u>appname</u>	varchar(25)	<pk>

phpgw_lang		
<u>message_id</u>	varchar(255)	<pk>
<u>app_name</u>	varchar(100)	<pk>
<u>lang</u>	varchar(5)	<pk, fk>
content	text	

lang_id = lang

phpgw_languages		
<u>lang_id</u>	char(2)	<pk>
lang_name	varchar(50)	
available	char(3)	

phpgw_app_sessions		
sessionid	varchar(255)	
loginid	varchar(20)	
location	varchar(255)	
app	varchar(20)	
content	text	
session_dla	integer(11)	

phpgw_hooks		
<u>hook_id</u>	integer(11)	<pk>
hook_appname	varchar(255)	
hook_location	varchar(255)	
hook_filename	varchar(255)	

phpgw_acl		
acl_appname	varchar(50)	
acl_location	varchar(255)	
acl_account	integer(11)	
acl_rights	integer(11)	

phpgw_history_log		
<u>history_id</u>	integer(11)	<pk>
history_record_id	integer(11)	
history_appname	varchar(64)	
history_owner	integer(11)	
history_status	char(2)	
history_new_value	text	
history_timestamp	datetime	

phpgw_vfs		
<u>file_id</u>	integer(11)	<pk>
owner_id	integer(11)	
createdby_id	integer(11)	
modifiedby_id	integer(11)	
created	date	
modified	date	
size	integer(11)	
mime_type	varchar(150)	
deleteable	char(1)	
comment	text	
app	varchar(25)	
directory	text	
name	text	
link_directory	text	
link_name	text	
version	varchar(30)	
content	text	

phpgw_interserv		
<u>server_id</u>	integer(11)	<pk>
server_name	varchar(64)	
server_host	varchar(255)	
server_url	varchar(255)	
trust_level	integer(11)	
trust_rel	integer(11)	
username	varchar(64)	
password	varchar(255)	
admin_name	varchar(255)	
admin_email	varchar(255)	
server_mode	varchar(16)	
server_security	varchar(16)	

phpgw_categories		
<u>cat_id</u>	integer(11)	<pk>
cat_main	integer(11)	
cat_parent	integer(11)	
cat_level	smallint(6)	
cat_owner	integer(11)	
cat_access	varchar(7)	
cat_appname	varchar(50)	
cat_name	varchar(150)	
cat_description	varchar(255)	
cat_data	text	

account_id = acl_;

Physical Data Model

Model: phpGroupware

Package:

Diagram: phpGroupware

Author: Dipl.-Inform. Kai Hofmann Date : 26.04.2003

Version : HEAD

phpgwapi

phpgw_log		
<u>log_id</u>	integer(11)	<pk,fk2>
log_date	datetime	
log_user	integer(11)	<fk1>
log_app	varchar(50)	
log_severity	char(1)	

phpgw_log_msg		
<u>log_msg_log_id</u>	integer(11)	<pk,fk>
<u>log_msg_seq_no</u>	integer(11)	<pk>
log_msg_date	datetime	
log_msg_tx_fid	varchar(4)	
log_msg_tx_id	varchar(4)	
log_msg_severity	char(1)	
log_msg_code	varchar(30)	
log_msg_msg	text	
log_msg_parms	text	
log_msg_file	varchar(255)	
log_msg_line	integer(11)	

phpgw_accounts		
<u>account_id</u>	integer(11)	<pk>
account_lid	varchar(25)	
account_pwd	varchar(32)	
account_firstname	varchar(50)	
account_lastname	varchar(50)	
account_permissions	text	
account_groups	varchar(30)	
account_lastlogin	integer(11)	
account_lastloginfrom	varchar(255)	
account_lastpwd_change	integer(11)	
account_status	char(1)	
account_expires	integer(11)	
account_type	char(1)	

phpgw_addressbook		
<u>id</u>	integer(11)	<pk>
lid	varchar(32)	<fk>
tid	char(1)	
owner	bigint(20)	
access	varchar(7)	
cat_id	varchar(32)	
fn	varchar(64)	
n_family	varchar(64)	
n_given	varchar(64)	
n_middle	varchar(64)	
n_prefix	varchar(64)	
n_suffix	varchar(64)	
sound	varchar(64)	
bday	varchar(32)	
note	text	
tz	varchar(8)	
geo	varchar(32)	
url	varchar(128)	
pubkey	text	
org_name	varchar(64)	
org_unit	varchar(64)	
title	varchar(64)	
adr_one_street	varchar(64)	
adr_one_locality	varchar(64)	
adr_one_region	varchar(64)	
adr_one_postalcode	varchar(64)	
adr_one_countryname	varchar(64)	
adr_one_type	varchar(32)	
label	text	
adr_two_street	varchar(64)	
adr_two_locality	varchar(64)	
adr_two_region	varchar(64)	
adr_two_postalcode	varchar(64)	
adr_two_countryname	varchar(64)	
adr_two_type	varchar(32)	
tel_work	varchar(40)	
tel_home	varchar(40)	
tel_voice	varchar(40)	
tel_fax	varchar(40)	
tel_msg	varchar(40)	
tel_cell	varchar(40)	
tel_pager	varchar(40)	
tel_bbs	varchar(40)	
tel_modem	varchar(40)	
tel_car	varchar(40)	
tel_isdn	varchar(40)	
tel_video	varchar(40)	
tel_prefer	varchar(32)	
email	varchar(64)	
email_type	varchar(32)	
email_home	varchar(64)	
email_home_type	varchar(32)	

phpgw_access_log	
sessionid	varchar(32)
loginid	varchar(30)
ip	varchar(30)
li	integer(11)
lo	varchar(255)
account_id	integer(11)

phpgw_addressbook_extra	
contact_id	integer(11)
contact_owner	bigint(20)
contact_name	varchar(255)
contact_value	text

account

phpgw_cal		
<u>cal_id</u>	integer(11)	<pk>
uid	varchar(255)	
owner	bigint(20)	
category	varchar(30)	
groups	varchar(255)	
datetime	bigint(20)	
mdatetime	bigint(20)	
edatetime	bigint(20)	
priority	bigint(20)	
cal_type	varchar(10)	
is_public	bigint(20)	
title	varchar(80)	
description	text	
location	varchar(255)	
reference	bigint(20)	

calendar

phpgw_cal_user			
<u>cal_id</u>	bigint(20)	<pk,fk>	
<u>cal_login</u>	bigint(20)	<pk>	
cal_status	char(1)		

cal_id = cal_id

phpgw_cal_repeats			
cal_id	bigint(20)	<fk>	
recur_type	bigint(20)		
recur_use_end	bigint(20)		
recur_enddate	bigint(20)		
recur_interval	bigint(20)		
recur_data	bigint(20)		
recur_exception	varchar(255)		

cal_id = cal_id

phpgw_cal_holidays		
<u>hol_id</u>	integer(11)	<pk>
locale	char(2)	
name	varchar(50)	
mday	bigint(20)	
month_num	bigint(20)	
occurrence	bigint(20)	
dow	bigint(20)	
observance_rule	bigint(20)	

phpgw_cal_alarm		
<u>alarm_id</u>	integer(11)	<pk>
cal_id	bigint(20)	
cal_owner	bigint(20)	
cal_time	bigint(20)	
cal_text	varchar(50)	
alarm_enabled	integer(11)	

todo

phpgw_todo		
<u>todo_id</u>	integer(11)	<pk>
todo_id_parent	integer(11)	
todo_id_main	integer(11)	
todo_level	smallint(6)	
todo_owner	integer(11)	
todo_access	varchar(7)	
todo_cat	integer(11)	
todo_title	varchar(255)	
todo_des	text	
todo_pri	integer(11)	
todo_status	integer(11)	
todo_datecreated	integer(11)	
todo_startdate	integer(11)	
todo_enddate	integer(11)	
todo_assigned	varchar(255)	
assigned_group	varchar(255)	

xmlrpc

hr

manual

phpsysinfo

transy

soap

backup

notifywindow

squirrelmail

vmailmgr

ftp

filemanager

img

phpgw_img		
<u>img_id</u>	integer(11)	<pk>
img_owner	varchar(25)	
img_file	varchar(255)	
img_cat	integer(11)	
img_name	varchar(255)	
img_title	varchar(255)	
img_des	text	
img_thumb	varchar(255)	
img_copy	varchar(255)	

phpgw_infolog


<u>info_id</u>	integer(11)	<pk>
info_type	varchar(10)	
info_from	varchar(64)	
info_addr	varchar(64)	
info_subject	varchar(64)	
info_des	text	
info_owner	integer(11)	
info_responsible	integer(11)	
info_access	varchar(10)	
info_cat	integer(11)	
info_datemodified	integer(11)	
info_startdate	integer(11)	
info_enddate	integer(11)	
info_id_parent	integer(11)	
info_pri	varchar(10)	
info_time	integer(11)	
info_bill_cat	integer(11)	
info_status	varchar(10)	
info_confirm	varchar(10)	
info_modifier	integer(11)	
info_link_id	integer(11)	

phpgw_links


<u>link_id</u>	integer(11)	<pk>
link_app1	varchar(25)	
link_id1	varchar(50)	
link_app2	varchar(25)	
link_id2	varchar(50)	
link_remark	varchar(50)	
link_lastmod	integer(11)	
link_owner	integer(11)	

infolog


project

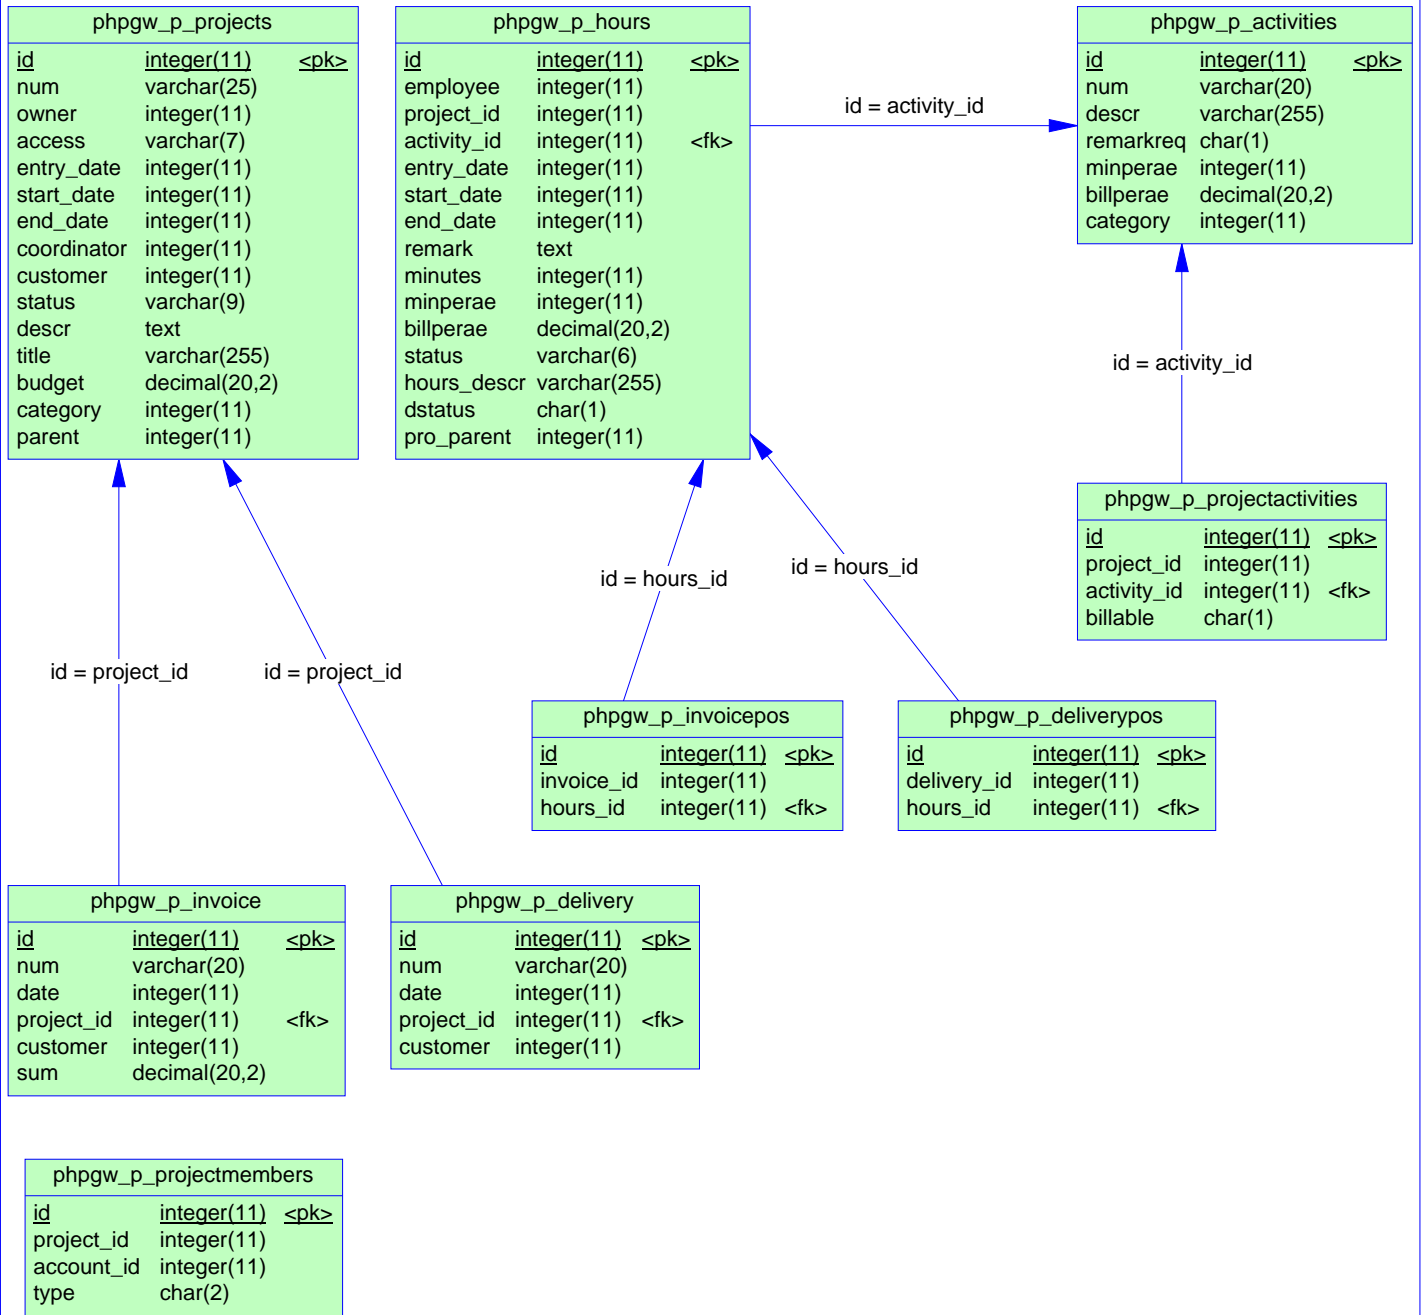


polls

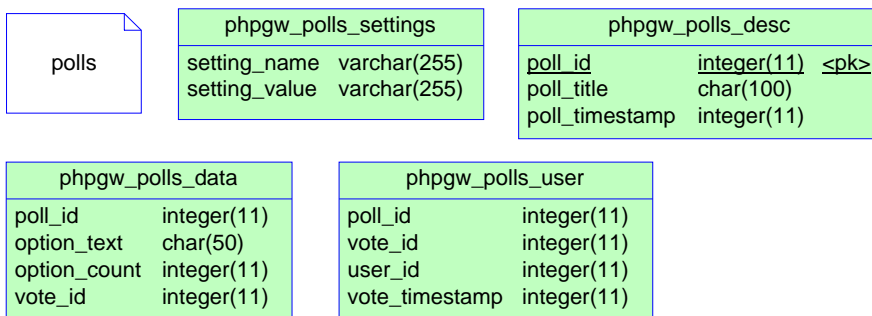

skel



fax



weather

phpgw_weather_links			
<u>links_id</u>	integer(11)	<pk>	
links_name	varchar(35)		
links_timetag	integer(11)		
links_refresh	integer(11)		
links_linkurl	varchar(255)		
links_baseurl	varchar(255)		
links_parseurl	varchar(255)		
links_parseexpr	varchar(255)		
links_imageurl	varchar(255)		
links_comment	varchar(255)		
links_type	varchar(255)		

phpgw_weather_metar			
<u>metar_id</u>	integer(11)	<pk>	
metar_weather	varchar(255)		
metar_timestamp	datetime		
<u>metar_station</u>	varchar(4)	<pk>	
metar_city	varchar(128)		
metar_forecast	varchar(6)		
metar_map	char(3)		
region_id	integer(11)	<fk>	

region_id = region_id

phpgw_weather_region			
<u>region_id</u>	integer(11)	<pk>	
region_name	varchar(50)		

phpgw_weather_admin			
admin_gdlib_e	integer(11)		
admin_gdtype	integer(11)		
admin_imgsrc	integer(11)		
admin_remote_e	integer(11)		
admin_filesize	bigint(20)		

phpgw_weather			
<u>weather_id</u>	integer(11)	<pk>	
weather_owner	varchar(32)		
weather_metar	varchar(255)		
weather_links	varchar(255)		
weather_title_e	integer(11)		
weather_observ_e	integer(11)		
weather_foreca_e	integer(11)		
weather_links_e	integer(11)		
weather_wunder_e	integer(11)		
weather_fpage_e	integer(11)		
weather_template	integer(11)		
weather_city	varchar(50)		
weather_country	varchar(50)		
weather_gstation	varchar(25)		
weather_sticker	integer(11)		
weather_tmetar	varchar(25)		
weather_tsize	integer(11)		
weather_fpmetar	varchar(25)		
weather_fpsize	integer(11)		
state_id	integer(11)	<fk>	

state_id = state_id

phpgw_us_states			
<u>state_id</u>	integer(11)	<pk>	
state_code	char(2)		
state_name	varchar(50)		

bookmarks

phpgw_bookmarks			
<u>bm_id</u>	integer(11)	<pk>	
bm_owner	integer(11)		
bm_access	varchar(255)		
bm_url	varchar(255)		
bm_name	varchar(255)		
bm_desc	varchar(255)		
bm_keywords	varchar(255)		
bm_category	integer(11)		
bm_rating	integer(11)		
bm_info	varchar(255)		
bm_visits	integer(11)		

qmaildap

phpgw_qmaildap			
<u>id</u>	integer(11)	<pk>	
qmail_servername	varchar(50)		
qmail_dn	varchar(200)		
use_default_ldap_server	smallint(6)		
ldap_servername	varchar(50)		
ldap_basedn	varchar(200)		
ldap_admindn	varchar(200)		
ldap_adminpw	varchar(30)		
description	varchar(200)		

felamimail

phpgw_felamimail_cache			
<u>accountid</u>	integer(11)	<pk>	
<u>hostname</u>	varchar(60)	<pk>	
<u>accountname</u>	varchar(200)	<pk>	
<u>foldername</u>	varchar(200)	<pk>	
<u>uid</u>	integer(11)	<pk>	
subject	text		
striped_subject	text		
sender_name	varchar(120)		
sender_address	varchar(120)		
to_name	varchar(120)		
to_address	varchar(120)		
date	datetime		
size	integer(11)		
attachments	varchar(120)		

phpgw_felamimail_folderstatus			
<u>accountid</u>	integer(11)	<pk>	
<u>hostname</u>	varchar(60)	<pk>	
<u>accountname</u>	varchar(200)	<pk>	
<u>foldername</u>	varchar(200)	<pk>	
messages	integer(11)		
recent	integer(11)		
unseen	integer(11)		
uidnext	integer(11)		
uidvalidity	integer(11)		

comic

phpgw_comic_data			
<u>data_id</u>	integer(11)	<pk>	
data_enabled	char(1)		
data_name	varchar(25)		
data_author	varchar(128)		
data_title	varchar(255)		
data_prefix	varchar(25)		
data_date	integer(11)		
data_comicid	integer(11)		
data_linkurl	varchar(255)		
data_baseurl	varchar(255)		
data_parseurl	varchar(255)		
data_parseexpr	varchar(255)		
data_imageurl	varchar(255)		
data_pubdays	varchar(25)		
data_parser	varchar(32)		
data_class	varchar(32)		
data_censorlvl	smallint(6)		
data_resolve	varchar(32)		
data_daysold	integer(11)		
data_width	integer(11)		
data_swidth	integer(11)		

phpgw_comic			
<u>comic_id</u>	integer(11)	<pk>	
comic_owner	varchar(32)		
comic_list	blob		
comic_scale	smallint(6)		
comic_perpage	smallint(6)		
comic_frontpage	integer(11)		
comic_fpscale	smallint(6)		
comic_censorlvl	smallint(6)		
comic_template	smallint(6)		

phpgw_comic_admin			
<u>admin_imgsrc</u>	smallint(6)	<pk>	
admin_rmtenabled	smallint(6)		
admin_censorlvl	smallint(6)		
admin_override	smallint(6)		
admin_filesize	integer(11)		

netsaint

phpgw_ns_hostgroup

<u>hg_id</u>	integer(11)	<pk>
hg_name	varchar(25)	
hg_owner	integer(11)	
hg_access	varchar(7)	
hg_cat	integer(11)	
hg_date	integer(11)	
hg_alias	varchar(255)	
hg_contact	varchar(255)	
hg_hosts	text	

phpgw_ns_host

<u>h_id</u>	integer(11)	<pk>
h_name	varchar(25)	
h_owner	integer(11)	
h_access	varchar(7)	
h_cat	integer(11)	
h_date	integer(11)	
h_alias	varchar(225)	
h_address	varchar(255)	
h_parent	varchar(255)	
h_check	varchar(25)	
h_max_attempts	smallint(6)	
h_not_intval	smallint(6)	
h_not_period	varchar(25)	
h_not_recovery	char(1)	
h_not_down	char(1)	
h_not_unreach	char(1)	
h_event_handler	varchar(25)	

phpgw_ns_time

<u>t_id</u>	integer(11)	<pk>
t_value	varchar(11)	

phpgw_ns_contactgroup

<u>cg_id</u>	integer(11)	<pk>
cg_name	varchar(25)	
cg_owner	integer(11)	
cg_access	varchar(7)	
cg_cat	integer(11)	
cg_date	integer(11)	
cg_alias	varchar(255)	
cg_contacts	text	

phpgw_ns_contact

<u>c_id</u>	integer(11)	<pk>
c_name	varchar(25)	
c_owner	integer(11)	
c_access	varchar(7)	
c_cat	integer(11)	
c_date	integer(11)	
c_alias	varchar(255)	
csv_not_period	varchar(25)	
h_not_period	varchar(25)	
not_service_rec	char(1)	
not_service_crit	char(1)	
not_service_warn	char(1)	
not_host_rec	char(1)	
not_host_down	char(1)	
not_host_unreach	char(1)	
service_not_comand	varchar(255)	
host_not_comand	varchar(255)	
c_email	varchar(50)	
c_pager	varchar(50)	

phpgw_ns_escalation

<u>e_id</u>	integer(11)	<pk>
e_owner	integer(11)	
e_access	varchar(7)	
e_cat	integer(11)	
e_date	integer(11)	
e_name	varchar(25)	
e_type	varchar(4)	
e_descr	varchar(255)	
e_first	smallint(6)	
e_last	smallint(6)	
e_c_groups	varchar(255)	

phpgw_ns_service

<u>s_id</u>	integer(11)	<pk>
s_owner	integer(11)	
s_access	varchar(7)	
s_cat	integer(11)	
s_date	integer(11)	
s_host	varchar(25)	
s_descr	varchar(255)	
s_vol	char(1)	
s_period	varchar(25)	
s_max	smallint(6)	
c_intval	smallint(6)	
r_intval	smallint(6)	
cg	varchar(25)	
not_intval	smallint(6)	
not_period	varchar(25)	
not_recover	char(1)	
not_crit	char(1)	
not_warn	char(1)	
s_event	varchar(25)	
s_comand	varchar(25)	

phpgw_ns_comand

<u>co_id</u>	integer(11)	<pk>
co_cat	integer(11)	
co_date	integer(11)	
co_name	varchar(25)	
co_line	text	
co_enabled	char(1)	
co_type	varchar(4)	

phpgw_ns_tp

<u>tp_id</u>	integer(11)	<pk>
tp_name	varchar(25)	
tp_owner	integer(11)	
tp_access	varchar(7)	
tp_cat	integer(11)	
tp_date	integer(11)	
tp_alias	varchar(225)	
sun_time	varchar(255)	
mon_time	varchar(255)	
tue_time	varchar(255)	
wed_time	varchar(255)	
thu_time	varchar(255)	
fri_time	varchar(255)	
sat_time	varchar(255)	

messenger

phpgw_messenger_messages

<u>message_id</u>	integer(11)	<pk>
message_owner	integer(11)	
message_from	integer(11)	
message_status	char(1)	
message_date	integer(11)	
message_subject	text	
message_content	text	

meerkat

phpgw_discuss

<u>msg_id</u>	integer(11)	
name	varchar(255)	
comment	varchar(255)	
count	integer(11)	

eldaptir

phpgw_eldaptir_schema

<u>id</u>	integer(11)	
_oid	varchar(64)	
name	varchar(64)	
extra	varchar(255)	
descr	varchar(255)	
must	varchar(255)	
may	varchar(255)	

phpgw_eldaptir_servers

<u>id</u>	integer(11)	<pk>
name	varchar(32)	
type	varchar(32)	
basedn	varchar(64)	
rootdn	varchar(64)	
rootpw	varchar(64)	
is_default	smallint(6)	

cdb

phpgw_cdb_contact_main		
<u>contact_id</u>	integer(11)	<pk>
main_organization_location_sele	integer(11)	
first_name	varchar(255)	
middle_name	varchar(255)	
last_name	varchar(255)	
last_name_prefix	varchar(10)	
initials	varchar(6)	
location	varchar(255)	
nickname	varchar(255)	
profession	varchar(255)	
suffix	varchar(20)	
title	varchar(20)	
email_selector	integer(11)	
web_selector	integer(11)	
mailing_address_selector	integer(11)	
phone1_selector	integer(11)	
phone2_selector	integer(11)	
phone3_selector	integer(11)	
phone4_selector	integer(11)	
phone5_selector	integer(11)	
phone6_selector	integer(11)	
phone7_selector	integer(11)	
phone8_selector	integer(11)	

phpgw_cdb_contact_personal		
<u>contact_id</u>	integer(11)	<pk>
birthday	integer(11)	
children	text	
gender	varchar(32)	
gov_id_num	varchar(20)	
hobbies	text	
language	integer(11)	
spouse	text	
anniversary	integer(11)	

phpgw_cdb_contact_org		
<u>organization_link_id</u>	integer(11)	<pk>
organization_location_id	integer(11)	
contact_id	integer(11)	
assistant_name	varchar(255)	
assistant_phone	varchar(100)	
assistant_email	varchar(50)	
department	varchar(255)	
job_title	varchar(255)	
manager_name	varchar(255)	

phpgw_cdb_contact_internet		
<u>contact_id</u>	integer(11)	<pk>
email_home	char(50)	
email_home_display	char(50)	
email_business	char(50)	
email_business_display	char(50)	
email_other	char(50)	
email_other_display	char(50)	
ftp	char(100)	
free_busy_address	char(100)	
personal_home_page	char(100)	
business_home_page	char(100)	
other_home_page	char(100)	
send_as_plain_text	integer(11)	
icq	char(20)	

phpgw_cdb_contact_client		
<u>contact_id</u>	integer(11)	<pk>
account	text	
billing_info	text	
customer_id	varchar(20)	
referred_by	text	

phpgw_cdb_contact_flag		
<u>flag_id</u>	integer(11)	<pk>
user_id	integer(11)	
flag_name	char(40)	
flag_color	char(6)	

phpgw_cdb_contact_followup		
<u>followup_id</u>	integer(11)	<pk>
followup_name	char(20)	
followup_color	char(6)	

phpgw_cdb_contact_flag_link		
<u>flag_link_id</u>	integer(11)	<pk>
user_id	integer(11)	
contact_id	integer(11)	
flag_id	integer(11)	

phpgw_cdb_entity_notes		
<u>entity_id</u>	integer(11)	<pk>
note	text	

phpgw_cdb_entity_meta		
<u>entity_id</u>	integer(11)	<pk>
status	varchar(16)	
created	integer(11)	
modified	integer(11)	
file_as	varchar(50)	
followup_status	integer(11)	
created_by	integer(11)	
keywords	text	
group_access	integer(11)	
version	float(12,31)	
ldap_sync	integer(11)	
ldap_dn	varchar(100)	

phpgw_cdb_contact_addr		
<u>contact_address_id</u>	integer(11)	<pk>
entity_id	integer(11)	
address_category_id	integer(11)	
address_city	varchar(255)	
address_country	varchar(255)	
postal_code	varchar(255)	
address_street	varchar(255)	

phpgw_cdb_entity_id		
<u>entity_id</u>	integer(11)	<pk>
contact_id	integer(11)	
organization_id	integer(11)	

phpgw_cdb_contact_addr_cat		
<u>address_category_id</u>	integer(11)	<pk>
address_category_name	char(20)	

phpgw_cdb_category_link		
<u>category_link_id</u>	integer(11)	<pk>
category_id	integer(11)	<fk2>
entity_id	integer(11)	<fk1>

phpgw_cdb_contact_phone		
<u>contact_phone_id</u>	integer(11)	<pk>
entity_id	integer(11)	
phone_category_id	integer(11)	
number	char(100)	

phpgw_cdb_contact_phone_cat		
<u>phone_category_id</u>	integer(11)	<pk>
phone_category_name	char(20)	

phpgw_cdb_category		
<u>category_id</u>	integer(11)	<pk>
name	char(40)	

entity_id = entity_id

category_id = category_id

property

fm_acl2

acl_host	integer(11)	
acl_appid	integer(11)	
acl_account	integer(11)	<fk>
acl_location	varchar(255)	
acl_rights	integer(11)	
acl_type	smallint(6)	
acl_data	text	

fm_request_attrb

<u>request_id</u>	integer(11)	<pk>
<u>request_type_id</u>	varchar(20)	<pk>
<u>r_type_attrb_id</u>	varchar(20)	<pk>
c	varchar(50)	
i	integer(11)	
n	decimal(10,2)	
category	integer(11)	
owner	integer(11)	
access	varchar(7)	

fm_request_type

<u>id</u>	varchar(20)	<pk>
descr	varchar(50)	

fm_request_type_attrb

<u>r_type_attrb_id</u>	varchar(20)	<pk>
<u>request_type_id</u>	varchar(20)	<pk>
attrib_descr	varchar(50)	
datatype	char(1)	

fm_request_status

<u>id</u>	varchar(20)	<pk>
descr	varchar(255)	

fm_request_priority_key

<u>id</u>	integer(11)	<pk>
safety	integer(11)	
aesthetics	integer(11)	
indoor_climate	integer(11)	
consequential_damage	integer(11)	
user_gratification	integer(11)	
residential_environment	integer(11)	
authorities_demands	integer(11)	

fm_request

<u>id</u>	integer(11)	<pk>
request_type_id	varchar(20)	
descr	varchar(50)	
category	integer(11)	
owner	integer(11)	
access	varchar(7)	
location_code	varchar(20)	
equipment_id	varchar(20)	
floor	varchar(6)	
address	varchar(100)	
tenant_id	integer(11)	
contact_phone	varchar(12)	
date	integer(11)	
cost	integer(11)	
status	varchar(10)	
d_safety	integer(11)	
d_aesthetics	integer(11)	
d_indoor_climate	integer(11)	
d_consequential_damage	integer(11)	
d_user_gratification	integer(11)	
d_residential_environment	integer(11)	
p_safety	integer(11)	
p_aesthetics	integer(11)	
p_indoor_climate	integer(11)	
p_consequential_damage	integer(11)	
p_user_gratification	integer(11)	
p_residential_environment	integer(11)	
c_safety	integer(11)	
c_aesthetics	integer(11)	
c_indoor_climate	integer(11)	
c_consequential_damage	integer(11)	
c_user_gratification	integer(11)	
c_residential_environment	integer(11)	
authorities_demands	integer(11)	
score	integer(11)	

fm_equipment_type_attrb

<u>id</u>	integer(11)	<pk>
type_id	integer(11)	
name	varchar(20)	
descr	varchar(255)	
datatype	char(1)	

fm_equipment_status

<u>id</u>	varchar(20)	<pk>
descr	varchar(255)	

fm_equipment_attrb

<u>entity_id</u>	varchar(20)	<pk>
<u>type_id</u>	integer(11)	<pk>
<u>attrib_id</u>	integer(11)	<pk>
c	varchar(50)	
i	integer(11)	
n	decimal(10,2)	
t	datetime	
category	integer(11)	
owner	integer(11)	
access	varchar(7)	

span_tegning	
fullt_filnavn	varchar(255)
property_id	varchar(4)
building_id	char(2)
entrance_id	char(2)
floor_id	varchar(8)
tegningsfil	varchar(23)

t_ecoart		
<u>id</u>	<u>integer(11)</u>	<pk>
name	varchar(20)	
description	text	

t_ecobilagkilde		
<u>id</u>	<u>smallint(6)</u>	<pk>
name	varchar(20)	
description	text	

t_ecobilagtype		
<u>id</u>	<u>smallint(6)</u>	<pk>
name	varchar(20)	
description	text	

t_ecodimb		
<u>id</u>	<u>smallint(6)</u>	<pk>
name	varchar(20)	
description	text	

t_ecodimd		
<u>id</u>	<u>varchar(5)</u>	<pk>
name	varchar(20)	
description	text	

t_ecomva		
<u>id</u>	<u>smallint(6)</u>	<pk>
name	varchar(20)	
description	text	

t_ecologg	
batchid	integer(11)
ecobilagid	integer(11)
status	smallint(6)
melding	varchar(255)
tid	datetime

t_ecobilagoverf		
<u>id</u>	<u>integer(11)</u>	<pk>
bilagsnr	integer(11)	
kidnr	varchar(30)	
typeid	smallint(6)	
kildeid	smallint(6)	
pmwrkord_code	smallint(6)	
belop	decimal(20,2)	
fakturadato	datetime	
periode	smallint(6)	
forfallsdato	datetime	
fakturanr	varchar(15)	
spbudact_code	varchar(30)	
regtid	datetime	
artid	smallint(6)	
godkjentbelop	decimal(20,2)	
spvend_code	varchar(12)	
dima	varchar(20)	<fk>
dimb	smallint(6)	
mvakode	smallint(6)	
dimd	varchar(5)	
oppsynsmannid	varchar(12)	
saksbehandlerid	varchar(12)	
budsjettansvarligid	varchar(12)	
utbetalingid	varchar(12)	
oppsynsigndato	datetime	
saksigndato	datetime	
budsjettisigndato	datetime	
utbetalingsigndato	datetime	
overftid	datetime	
ordrebelp	decimal(20,2)	
merknad	text	
splitt	smallint(6)	
filnavn	varchar(255)	
kreditnota	smallint(6)	

t_ecobilag		
<u>id</u>	<u>integer(11)</u>	<pk>
bilagsnr	integer(11)	
kidnr	varchar(30)	
typeid	smallint(6)	
kildeid	smallint(6)	
pmwrkord_code	smallint(6)	
belop	decimal(20,2)	
fakturadato	datetime	
periode	smallint(6)	
forfallsdato	datetime	
fakturanr	varchar(15)	
spbudact_code	varchar(30)	
regtid	datetime	
artid	smallint(6)	
godkjentbelop	decimal(20,2)	
spvend_code	varchar(12)	
dima	varchar(20)	
dimb	smallint(6)	
mvakode	smallint(6)	
dimd	varchar(5)	
oppsynsmannid	varchar(12)	
saksbehandlerid	varchar(12)	
budsjettansvarligid	varchar(12)	
utbetalingid	varchar(12)	
oppsynsigndato	datetime	
saksigndato	datetime	
budsjettisigndato	datetime	
utbetalingsigndato	datetime	
merknad	text	
splitt	smallint(6)	
kreditnota	smallint(6)	

id = vendor_id

property_id = dima

fm_tts_tickets		
<u>id</u>	integer(11)	<pk>
group_id	integer(11)	
priority	smallint(6)	
owner	integer(11)	
assignedto	integer(11)	
subject	varchar(255)	
cat_id	integer(11)	
billable_hours	decimal(8,2)	
billable_rate	decimal(8,2)	
status	char(1)	
details	text	
location_code	varchar(4)	
floor	varchar(6)	
address	varchar(100)	
tenant_id	integer(11)	

fm_tts_history		
<u>history_id</u>	integer(11)	<pk>
history_record_id	integer(11)	
history_appname	varchar(64)	
history_owner	integer(11)	
history_status	char(2)	
history_new_value	text	
history_timestamp	datetime	

fm_tts_views		
id	integer(11)	
account_id	varchar(40)	
time	integer(11)	

fm_property_category		
<u>id</u>	integer(11)	<pk>
descr	varchar(50)	
owner	integer(11)	
access	varchar(7)	

fm_property_attrib		
<u>location_code</u>	varchar(20)	<pk>
<u>property_type_id</u>	integer(11)	<pk>
property_type_attrib_class_id	varchar(20)	
<u>p_type_attrib_id</u>	varchar(20)	<pk>
c	varchar(50)	
i	integer(11)	
n	decimal(10,2)	
category	integer(11)	
owner	integer(11)	
access	varchar(7)	

fm_property_type_attrib		
<u>id</u>	integer(11)	<pk>
<u>type_id</u>	integer(11)	<pk>
name	varchar(20)	
descr	varchar(50)	
datatype	char(1)	

fm_property_type_attrib_class		
<u>id</u>	integer(11)	<pk>
num	varchar(50)	
descr	varchar(50)	
category	integer(11)	
owner	integer(11)	
access	varchar(7)	

fm_documentation		
<u>id</u>	integer(11)	<pk>
entry_date	integer(11)	
cat_id	integer(11)	
owner	integer(11)	
location_code	varchar(50)	
equipment_id	varchar(50)	
title	varchar(100)	
link_name	varchar(50)	
link	varchar(255)	
descr	text	

fm_standard_unit		
<u>id</u>	varchar(20)	<pk>
descr	varchar(255)	

fm_submodule		
<u>id</u>	varchar(12)	<pk>
descr	varchar(50)	

fm_district		
<u>district_id</u>	smallint(6)	<pk>
district	char(20)	

fm_event_receipt		
<u>cal_id</u>	integer(11)	<pk>
<u>year_month_date</u>	integer(11)	<pk>
datetime_done	integer(11)	
datetime_reject	integer(11)	
user_id	integer(11)	

fm_idgenerator		
<u>name</u>	varchar(30)	<pk>
value	integer(11)	
increment	integer(11)	
maxvalue	smallint(6)	
descr	varchar(30)	

fm_wo_activity_price_index			
<u>activity_id</u>	integer(11)	<pk,fk1>	
<u>vendor_id</u>	integer(11)	<pk,fk2>	
<u>index_count</u>	integer(11)	<pk>	
current_index	smallint(6)		
this_index	decimal(20,2)		
m_cost	decimal(20,2)		
w_cost	decimal(20,2)		
total_cost	decimal(20,2)		
date	integer(11)		

fm_wo_template			
<u>id</u>	integer(11)	<pk>	
name	varchar(50)		
descr	varchar(255)		
owner	integer(11)		
chapter_id	integer(11)	<fk>	
entry_date	integer(11)		

fm_wo_template_hours			
<u>id</u>	integer(11)	<pk>	
record	integer(11)		
owner	integer(11)		
workorder_id	integer(11)		
activity_id	integer(11)		
activity_num	varchar(15)		
grouping_id	integer(11)		
grouping_descr	varchar(50)		
entry_date	integer(11)		
hours_descr	varchar(255)		
remark	text		
billperae	decimal(20,2)		
vendor_id	integer(11)		
unit	varchar(6)		
ns3420_id	varchar(20)		
tolerance	integer(11)		
building_part	varchar(4)		
quantity	decimal(20,2)		
cost	decimal(20,2)		
dim_d	integer(11)		

id = activity_id

id = chapter_id

fm_wo_chapter			
<u>id</u>	integer(11)	<pk>	
descr	varchar(50)		

id = chapter_id

fm_wo_activities			
<u>id</u>	integer(11)	<pk>	
num	varchar(25)		
base_descr	text		
unit	varchar(4)		
ns3420	varchar(15)		
remarkreq	varchar(5)		
minperae	integer(11)		
billperae	decimal(20,2)		
dim_d	integer(11)		
descr	text		
branch_id	integer(11)	<fk>	
agreement_id	integer(11)		

fm_wo_wrkorders			
<u>id</u>	integer(11)	<pk>	
num	varchar(20)		
project_id	integer(11)	<fk2>	
owner	integer(11)		
access	varchar(7)		
category	integer(11)		
chapter_id	integer(11)	<fk1>	
entry_date	integer(11)		
start_date	integer(11)		
end_date	integer(11)		
coordinator	integer(11)		
vendor_id	integer(11)		
status	varchar(20)		
descr	text		
title	varchar(255)		
budget	decimal(20,2)		
actual_cost	decimal(20,2)		
addition	integer(11)		
rig_addition	integer(11)		
account_id	integer(11)		
key_fetch	integer(11)		
key_deliver	integer(11)		
integration	integer(11)		
charge_tenant	smallint(6)		

fm_wo_hours			
<u>id</u>	integer(11)	<pk>	
record	integer(11)		
owner	integer(11)		
workorder_id	integer(11)		
activity_id	integer(11)		
activity_num	varchar(15)		
grouping_id	integer(11)		
grouping_descr	varchar(50)		
entry_date	integer(11)		
hours_descr	varchar(255)		
remark	text		
billperae	decimal(20,2)		
vendor_id	integer(11)		
unit	varchar(6)		
ns3420_id	varchar(20)		
tolerance	integer(11)		
building_part	varchar(4)		
quantity	decimal(20,2)		
cost	decimal(20,2)		
dim_d	integer(11)		

id = branch_id

fm_wo_branch			
<u>id</u>	integer(11)	<pk>	
num	varchar(20)		
descr	varchar(255)		

id = project_id

fm_wo_project_history			
<u>history_id</u>	integer(11)	<pk>	
history_record_id	integer(11)		
history_appname	varchar(64)		
history_owner	integer(11)		
history_status	char(2)		
history_new_value	text		
history_timestamp	datetime		

fm_wo_project			
<u>id</u>	integer(11)	<pk>	
name	varchar(20)		
owner	integer(11)		
access	varchar(7)		
category	integer(11)		
entry_date	integer(11)		
start_date	integer(11)		
end_date	integer(11)		
coordinator	integer(11)		
status	varchar(20)		
descr	text		
title	varchar(255)		
budget	decimal(20,2)		
actual_cost	decimal(20,2)		
location_code	varchar(20)		
floor	varchar(6)		
equipment_id	varchar(20)		
address	varchar(100)		
tenant_id	integer(11)		
contact_phone	varchar(12)		
key_fetch	integer(11)		
key_deliver	integer(11)		
other_branch	varchar(255)		
key_responsible	integer(11)		
charge_tenant	smallint(6)		

fm_wo_agreement			
<u>id</u>	integer(11)	<pk>	
num	varchar(25)		
descr	varchar(50)		
status	varchar(15)		

fm_wo_agreement_status			
<u>id</u>	varchar(20)	<pk>	
descr	varchar(255)		




fm_wo_ns3420			
<u>id</u>	varchar(20)	<pk>	
tekst1	varchar(50)		
enhet	varchar(6)		
tekst2	varchar(50)		
tekst3	varchar(50)		
tekst4	varchar(50)		
tekst5	varchar(50)		
tekst6	varchar(50)		
parent	varchar(20)		
type	varchar(20)		

fm_wo_workorder_history			
<u>history_id</u>	integer(11)	<pk>	
history_record_id	integer(11)		
history_appname	varchar(64)		
history_owner	integer(11)		
history_status	char(2)		
history_new_value	text		
history_timestamp	datetime		

fm_wo_projectbranch			
<u>project_id</u>	integer(11)	<pk>	
<u>branch_id</u>	integer(11)	<pk>	

fm_wo_wrkorders_status			
<u>id</u>	varchar(20)	<pk>	
descr	varchar(255)		

fm_wo_workorder_category			
<u>id</u>	integer(11)	<pk>	
descr	varchar(50)		
owner	integer(11)		
access	varchar(7)		

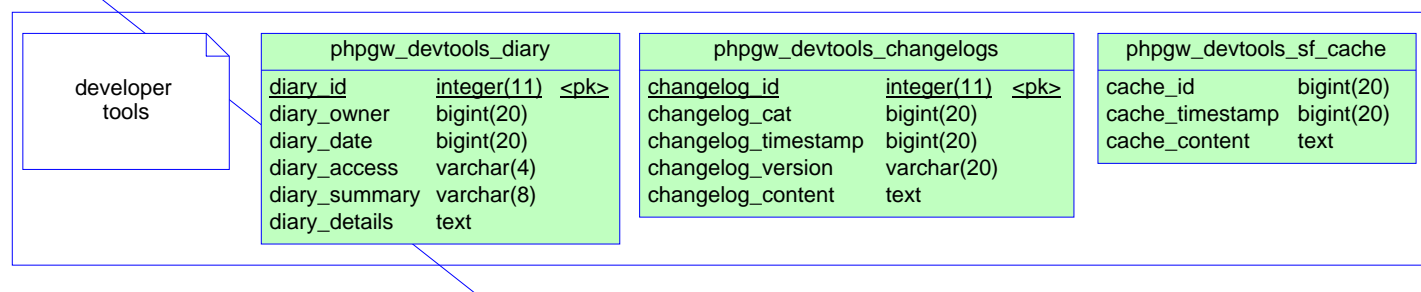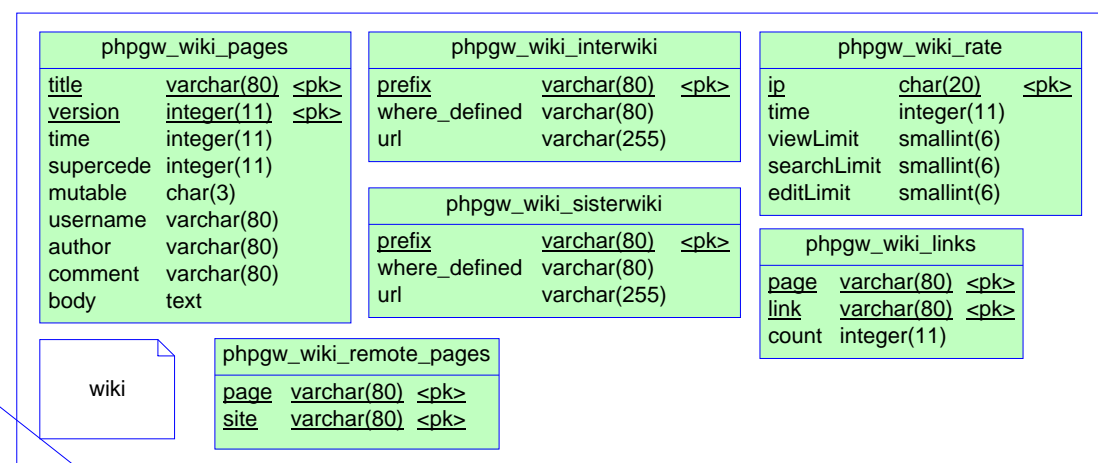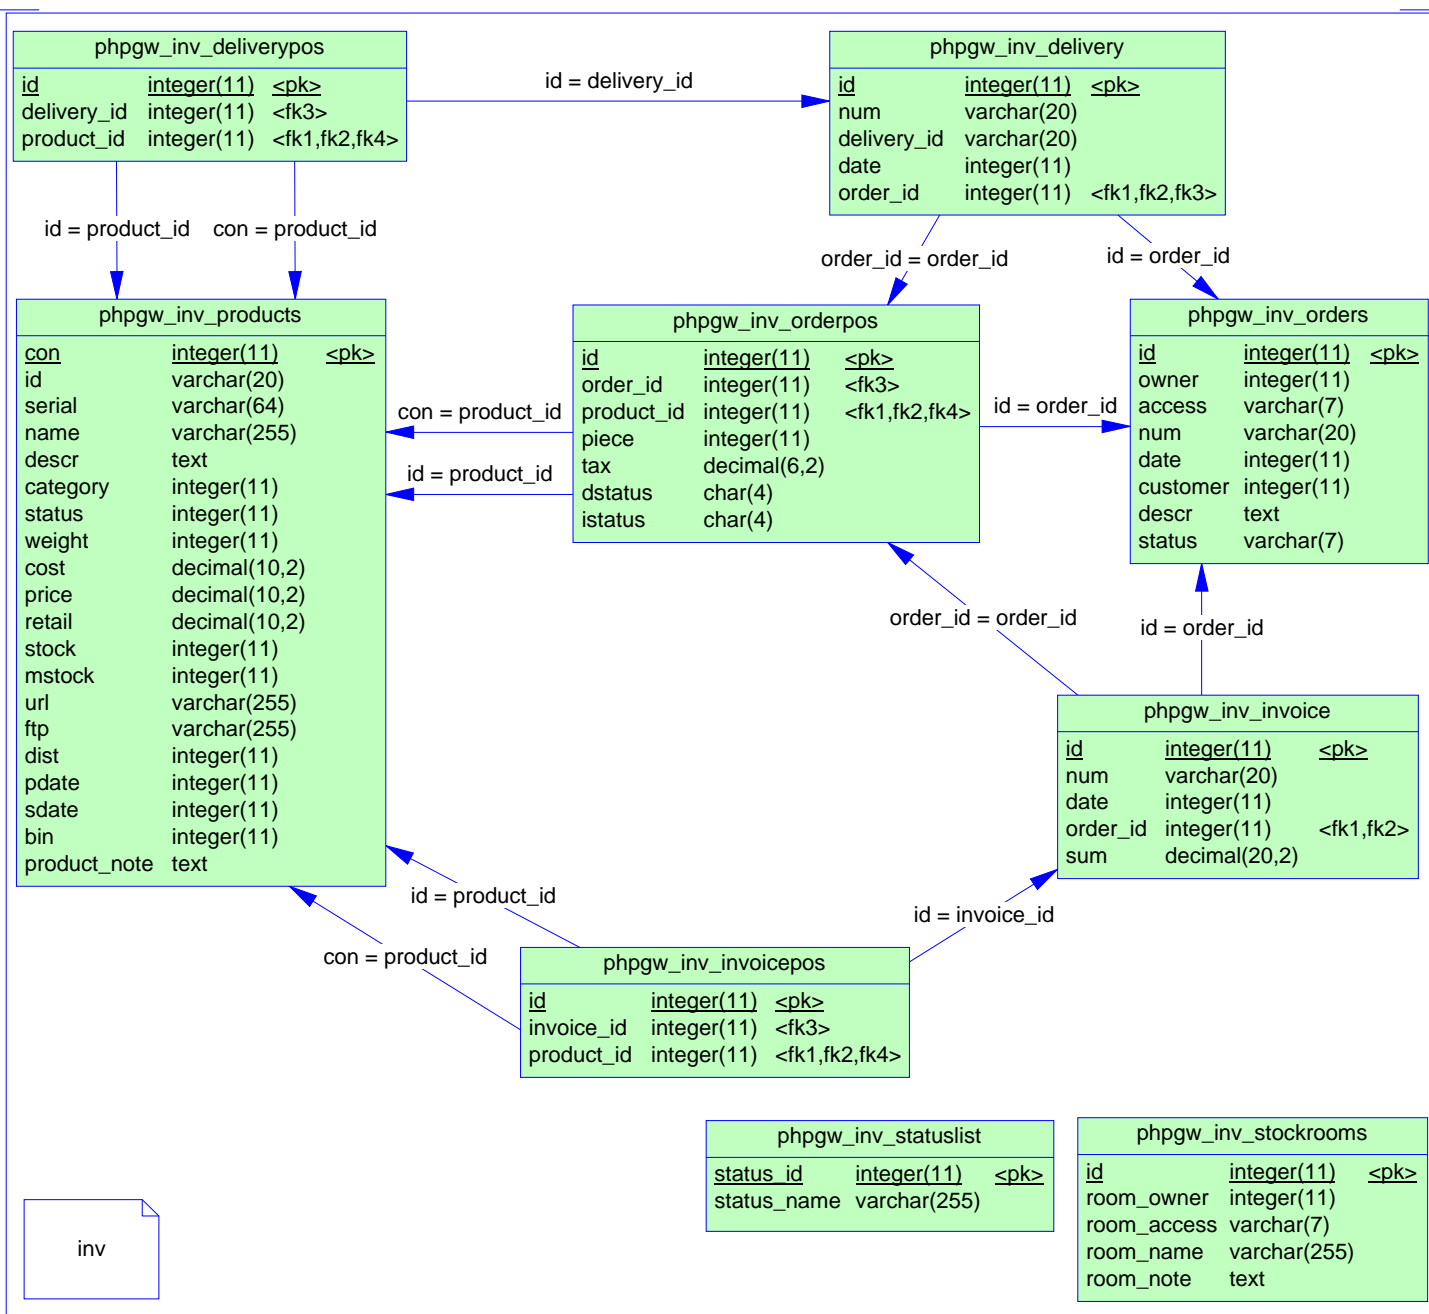

bookkeeping

phpgw_bk_t			
<u>transaction_id</u>	integer(11)	<pk>	
bookkeeping_account_id	integer(11)		
date_transaction	integer(11)		
category_id	integer(11)		
description	text		
amount	decimal(20,2)		
currency_id	integer(11)		
phpgw_account_id	integer(11)		
account_id	integer(11)		

phpgw_bk_c			
<u>category_id</u>	integer(11)	<pk>	
parent_category_id	integer(11)		
bookkeeping_account_id	integer(11)		
category	varchar(255)		
description	text		

phpgw_bk_ba			
<u>bookkeeping_account_id</u>	integer(11)	<pk>	
bookkeeping_account	varchar(255)		

phpgw_bk_bm			
bookkeeping_account_id	integer(11)		
module_id	integer(11)	<fk>	

module_id = module_id

phpgw_bk_a			
<u>account_id</u>	integer(11)	<pk>	
account_type_id	integer(11)		
bookkeeping_account_id	integer(11)		
account	varchar(255)		

phpgw_bk_at			
<u>account_type_id</u>	integer(11)	<pk>	
account_type	varchar(255)		

phpgw_bk_gr			
group_id	integer(11)		
location_id	integer(11)		
acl_right	integer(11)		

phpgw_bk_gpa			
group_id	integer(11)		
phpgw_account_id	integer(11)		

phpgw_bk_l			
<u>location_id</u>	integer(11)	<pk>	
location	varchar(255)		
module_id	integer(11)		

phpgw_bk_m			
<u>module_id</u>	integer(11)	<pk>	
module	varchar(255)		
module_order	integer(11)		

phpgw_bk_g			
<u>group_id</u>	integer(11)	<pk>	
group_	varchar(255)		
bookkeeping_account_id	integer(11)		

wcm

phpgw_wcm_pages			
<u>page_id</u>	integer(11)	<pk>	
page_name	varchar(64)		
page_title	varchar(255)		
page_url	varchar(255)		
page_elements	text		
page_header	varchar(255)		
page_footer	varchar(255)		
page_expire	varchar(64)		
page_langs	varchar(255)		
page_version	varchar(64)		
page_left	integer(11)		
page_mid	integer(11)		
page_right	integer(11)		
page_bgcolor	varchar(8)		
page_sites	varchar(64)		

phpgw_wcm_elements			
<u>element_id</u>	integer(11)	<pk>	
element_name	varchar(64)		
element_title	varchar(255)		
element_type	varchar(64)		
element_source	text		
element_hf	varchar(16)		
element_expire	varchar(64)		
element_langs	varchar(255)		
element_version	varchar(64)		
element_pages	varchar(64)		

phpgw_wcm_sites			
<u>site_id</u>	integer(11)	<pk>	
site_name	varchar(64)		
site_title	varchar(255)		
site_url	varchar(255)		
site_root	varchar(255)		
username	varchar(64)		
password	varchar(255)		
admin_name	varchar(255)		
admin_email	varchar(255)		
site_security	varchar(16)		
site_pages	text		
site_header	varchar(255)		
site_footer	varchar(255)		
site_langs	varchar(255)		
site_version	varchar(64)		
site_left	integer(11)		
site_mid	integer(11)		
site_right	integer(11)		
site_paneo	integer(11)		
site_pubtype	varchar(16)		
site_puburl	varchar(255)		
site_pubport	integer(11)		
site_bgcolor	varchar(8)		

tts

phpgw_tts_tickets			
<u>ticket_id</u>	integer(11)	<pk>	
ticket_group	varchar(40)		
ticket_priority	smallint(6)		
ticket_owner	varchar(10)		
ticket_assignedto	varchar(10)		
ticket_subject	varchar(255)		
ticket_category	varchar(25)		
ticket_billable_hours	decimal(8,2)		
ticket_billable_rate	decimal(8,2)		
ticket_status	char(1)		
ticket_details	text		

phpgw_tts_views			
view_id	integer(11)		
view_account_id	varchar(40)		
view_time	integer(11)		

cart

nntp

newsgroups

<u>con</u>	<u>integer(11)</u>	<u><pk></u>
name	varchar(255)	
messagecount	integer(11)	
lastmessage	integer(11)	
active	char(1)	
lastread	integer(11)	

news_msg

<u>con</u>	<u>integer(11)</u>	<u><pk></u>
<u>msg</u>	<u>integer(11)</u>	<u><pk></u>
uid	varchar(255)	
udate	integer(11)	
path	varchar(255)	
fromadd	varchar(255)	
toadd	varchar(255)	
ccadd	varchar(255)	
bccadd	varchar(255)	
reply_to	varchar(255)	
sender	varchar(255)	
return_path	varchar(255)	
subject	varchar(255)	
message_id	varchar(255)	
reference	varchar(255)	
in_reply_to	varchar(255)	
follow_up_to	varchar(255)	
nntp_posting_host	varchar(255)	
nntp_posting_date	varchar(255)	
x_complaints_to	varchar(255)	
x_trace	varchar(255)	
x_abuse_info	varchar(255)	
x_mailer	varchar(255)	
organization	varchar(255)	
content_type	varchar(255)	
content_description	varchar(255)	
content_transfer_encoding	varchar(255)	
mime_version	varchar(255)	
msgsize	integer(11)	
msglines	integer(11)	
body	text	

forum

phpgw_forum_forums

<u>id</u>	<u>integer(11)</u>	<u><pk></u>
name	varchar(255)	
perm	smallint(6)	
groups	varchar(255)	
descr	varchar(255)	
cat_id	integer(11)	

phpgw_forum_categories

<u>id</u>	<u>integer(11)</u>	<u><pk></u>
name	varchar(255)	
descr	varchar(255)	

phpgw_forum_body

<u>id</u>	<u>integer(11)</u>	<u><pk></u>
cat_id	integer(11)	
for_id	integer(11)	
message	blob	

phpgw_forum_threads

<u>id</u>	<u>integer(11)</u>	<u><pk></u>
postdate	datetime	
main	integer(11)	
parent	integer(11)	
cat_id	integer(11)	
for_id	integer(11)	
thread_owner	integer(11)	
subject	varchar(255)	
stat	smallint(6)	
thread	integer(11)	
depth	integer(11)	
pos	integer(11)	
n_replies	integer(11)	

dj

phpgw_dj_shows

<u>show_id</u>	<u>integer(11)</u>	<u><pk></u>
show_name	varchar(255)	
show_data	text	
show_owner	integer(11)	

phpgw_dj_directories

<u>dir_id</u>	<u>integer(11)</u>	<u><pk></u>
dir_name	varchar(255)	

phpgw_dj_que

<u>que_id</u>	<u>integer(11)</u>	<u><pk></u>
que_song	varchar(255)	

phpgw_dj_songlist

<u>song_id</u>	<u>integer(11)</u>	<u><pk></u>
song_name	varchar(255)	
song_title	varchar(255)	
song_artist	varchar(255)	
song_album	varchar(255)	
song_year	varchar(4)	
song_comment	varchar(255)	
song_genre	varchar(64)	
song_size	varchar(32)	
song_length	varchar(64)	
song_bitsize	integer(11)	
song_samplerate	integer(11)	
song_frames	integer(11)	
song_emphasis	varchar(255)	
song_cmode	varchar(255)	
song_version	varchar(255)	
song_layer	varchar(10)	
song_crc	varchar(255)	
song_copyright	varchar(4)	
song_original	varchar(255)	
song_status	char(2)	
song_cycle_status	char(1)	
export	smallint(6)	

phpbrain

phpgw_kb_faq

<u>faq_id</u>	<u>integer(11)</u>	<u><pk></u>
title	text	
text	text	
cat_id	integer(11)	
published	smallint(6)	
keywords	text	
user_id	integer(11)	
views	integer(11)	
modified	integer(11)	
is_faq	smallint(6)	
url	varchar(128)	
votes	integer(11)	
total	integer(11)	

phpgw_kb_questions

<u>question_id</u>	<u>integer(11)</u>	<u><pk></u>
question	text	
pending	smallint(6)	

phpgw_kb_comment

<u>comment_id</u>	<u>integer(11)</u>	<u><pk></u>
user_id	integer(11)	
comment	text	
entered	integer(11)	
faq_id	integer(11)	

phpgw_cdb_org		
<u>organization_id</u>	integer(11)	<pk>
organization_name	varchar(100)	
organization_home_page	text	
organization_network_name	varchar(100)	
organization_gov_id_num	varchar(20)	
main_location	integer(11)	

phpgw_cdb_org_client		
<u>organization_id</u>	integer(11)	<pk>
account	text	
billing_info	text	
customer_id	varchar(20)	
referred_by	text	

phpgw_cdb_org_location		
<u>location_id</u>	integer(11)	<pk>
organization_id	integer(11)	
location	text	
address_city	varchar(255)	
address_country	varchar(255)	
postal_code	varchar(255)	
address_street	varchar(255)	
number	varchar(100)	

phpgw_cdb_language		
<u>language_id</u>	integer(11)	<pk>
language_name	char(40)	
language_code	char(10)	

phpgw_cdb_views		
<u>view_id</u>	integer(11)	<pk>
cache_date	integer(11)	
owner	integer(11)	
group_owner	varchar(255)	
view_public	varchar(32)	
name	varchar(30)	
type	integer(11)	
view_fields	varchar(255)	
view_filter	text	
sort	varchar(100)	
view_group	varchar(100)	

phpgw_cdb_recent		
<u>account_id</u>	integer(11)	<pk>
orgs	varchar(20)	
contacts	varchar(20)	
views	varchar(20)	

mediadb

phpgw_mediadb		
<u>phpgw_mediadb_id</u>	integer(11)	<pk>
phpgw_mediadb_owner	varchar(25)	
phpgw_mediadb_access	varchar(10)	
phpgw_mediadb_score	integer(11)	
phpgw_mediadb_hscore	integer(11)	
phpgw_mediadb_idate	datetime	
phpgw_mediadb_avail	smallint(6)	
data_id	integer(11)	

phpgw_mediadb_data		
<u>data_id</u>	integer(11)	<pk>
data_genre	varchar(255)	
data_feature	varchar(255)	
data_artist	varchar(255)	
data_publisher	varchar(255)	
data_code	varchar(10)	
data_title	varchar(255)	
data_date	varchar(19)	
data_comments	varchar(255)	
data_score	integer(11)	
data_image	varchar(255)	
data_efile	varchar(255)	
data_pages	smallint(6)	
data_hscore	integer(11)	
cat_id	smallint(6)	
rating_id	smallint(6)	
format_id	smallint(6)	
region_id	smallint(6)	

phpgw_mediadb_lookup		
<u>lookup_id</u>	integer(11)	<pk>
lookup_url	varchar(255)	
lookup_block	varchar(255)	
lookup_component	varchar(255)	
lookup_field	varchar(25)	
cat_id	smallint(6)	

phpgw_mediadb_loan		
<u>loan_id</u>	integer(11)	<pk>
loan_owner	varchar(25)	
loan_borrower	varchar(25)	
loan_date	date	
loan_date_due	date	
loan_date_ret	date	
loan_returned	smallint(6)	
phpgw_mediadb_id	integer(11)	

phpgw_mediadb_cat		
<u>cat_id</u>	integer(11)	<pk>
cat_name	varchar(50)	
cat_enabled	smallint(6)	
cat_fname	varchar(255)	
cat_fenabled	varchar(255)	
cat_fwidth	varchar(255)	
cat_fsort	varchar(255)	

phpgw_mediadb_format		
<u>format_id</u>	integer(11)	<pk>
format_desc	varchar(64)	
format_efiles	smallint(6)	
format_pages	smallint(6)	
format_regions	smallint(6)	
format_hscores	smallint(6)	
cat_id	smallint(6)	

phpgw_mediadb_request		
<u>request_id</u>	integer(11)	<pk>
request_owner	varchar(25)	
request_status	varchar(255)	
request_date	date	
request_date_r	date	
phpgw_mediadb_id	integer(11)	

phpgw_mediadb_region		
<u>region_id</u>	integer(11)	<pk>
region_code	smallint(6)	
region_desc	varchar(25)	

phpgw_mediadb_feature		
<u>feature_id</u>	integer(11)	<pk>
feature_type	varchar(50)	
feature_desc	varchar(255)	

phpgw_mediadb_artist		
<u>artist_id</u>	integer(11)	<pk>
artist_fname	varchar(50)	
artist_lname	varchar(50)	

phpgw_mediadb_rating		
<u>rating_id</u>	integer(11)	<pk>
rating_desc	varchar(64)	
cat_id	smallint(6)	

phpgw_mediadb_genre		
<u>genre_id</u>	integer(11)	<pk>
genre_desc	varchar(64)	
cat_id	smallint(6)	

phpgw_mediadb_publisher		
<u>publisher_id</u>	integer(11)	<pk>
publisher_name	varchar(50)	

fm_equipment_type		
<u>id</u>	integer(11)	<pk>
name	varchar(20)	
descr	varchar(50)	
prefix	varchar(8)	

fm_equipment		
<u>equipment_id</u>	varchar(20)	<pk>
equipment_type_id	integer(11)	<fk2>
descr	varchar(255)	
cost	decimal(20,2)	
category	integer(11)	
owner	integer(11)	
access	varchar(7)	
location_code	varchar(20)	
property_id	varchar(4)	<fk1>
floor	varchar(6)	
address	varchar(50)	
vendor_id	integer(11)	<fk3>
date	integer(11)	
lifetime	integer(11)	
status	varchar(10)	

id = equipment_type_id

property_id = property


equipment_id = entity_id

property_id = entity_

fm_investment		
<u>entity_id</u>	varchar(20)	<pk,fk1,fk2>
<u>invest_id</u>	integer(11)	<pk,fk1>
entity_type	varchar(20)	
location_code	varchar(20)	
descr	varchar(255)	
writeoff_year	integer(11)	

fm_investment_value		
<u>entity_id</u>	varchar(20)	<pk,fk>
<u>invest_id</u>	integer(11)	<pk>
<u>index_count</u>	integer(11)	<pk>
current_index	smallint(6)	
this_index	decimal(20,4)	
initial_value	decimal(20,2)	
value	decimal(20,2)	
date	datetime	

entity_id = entity_id
invest_id = invest_id

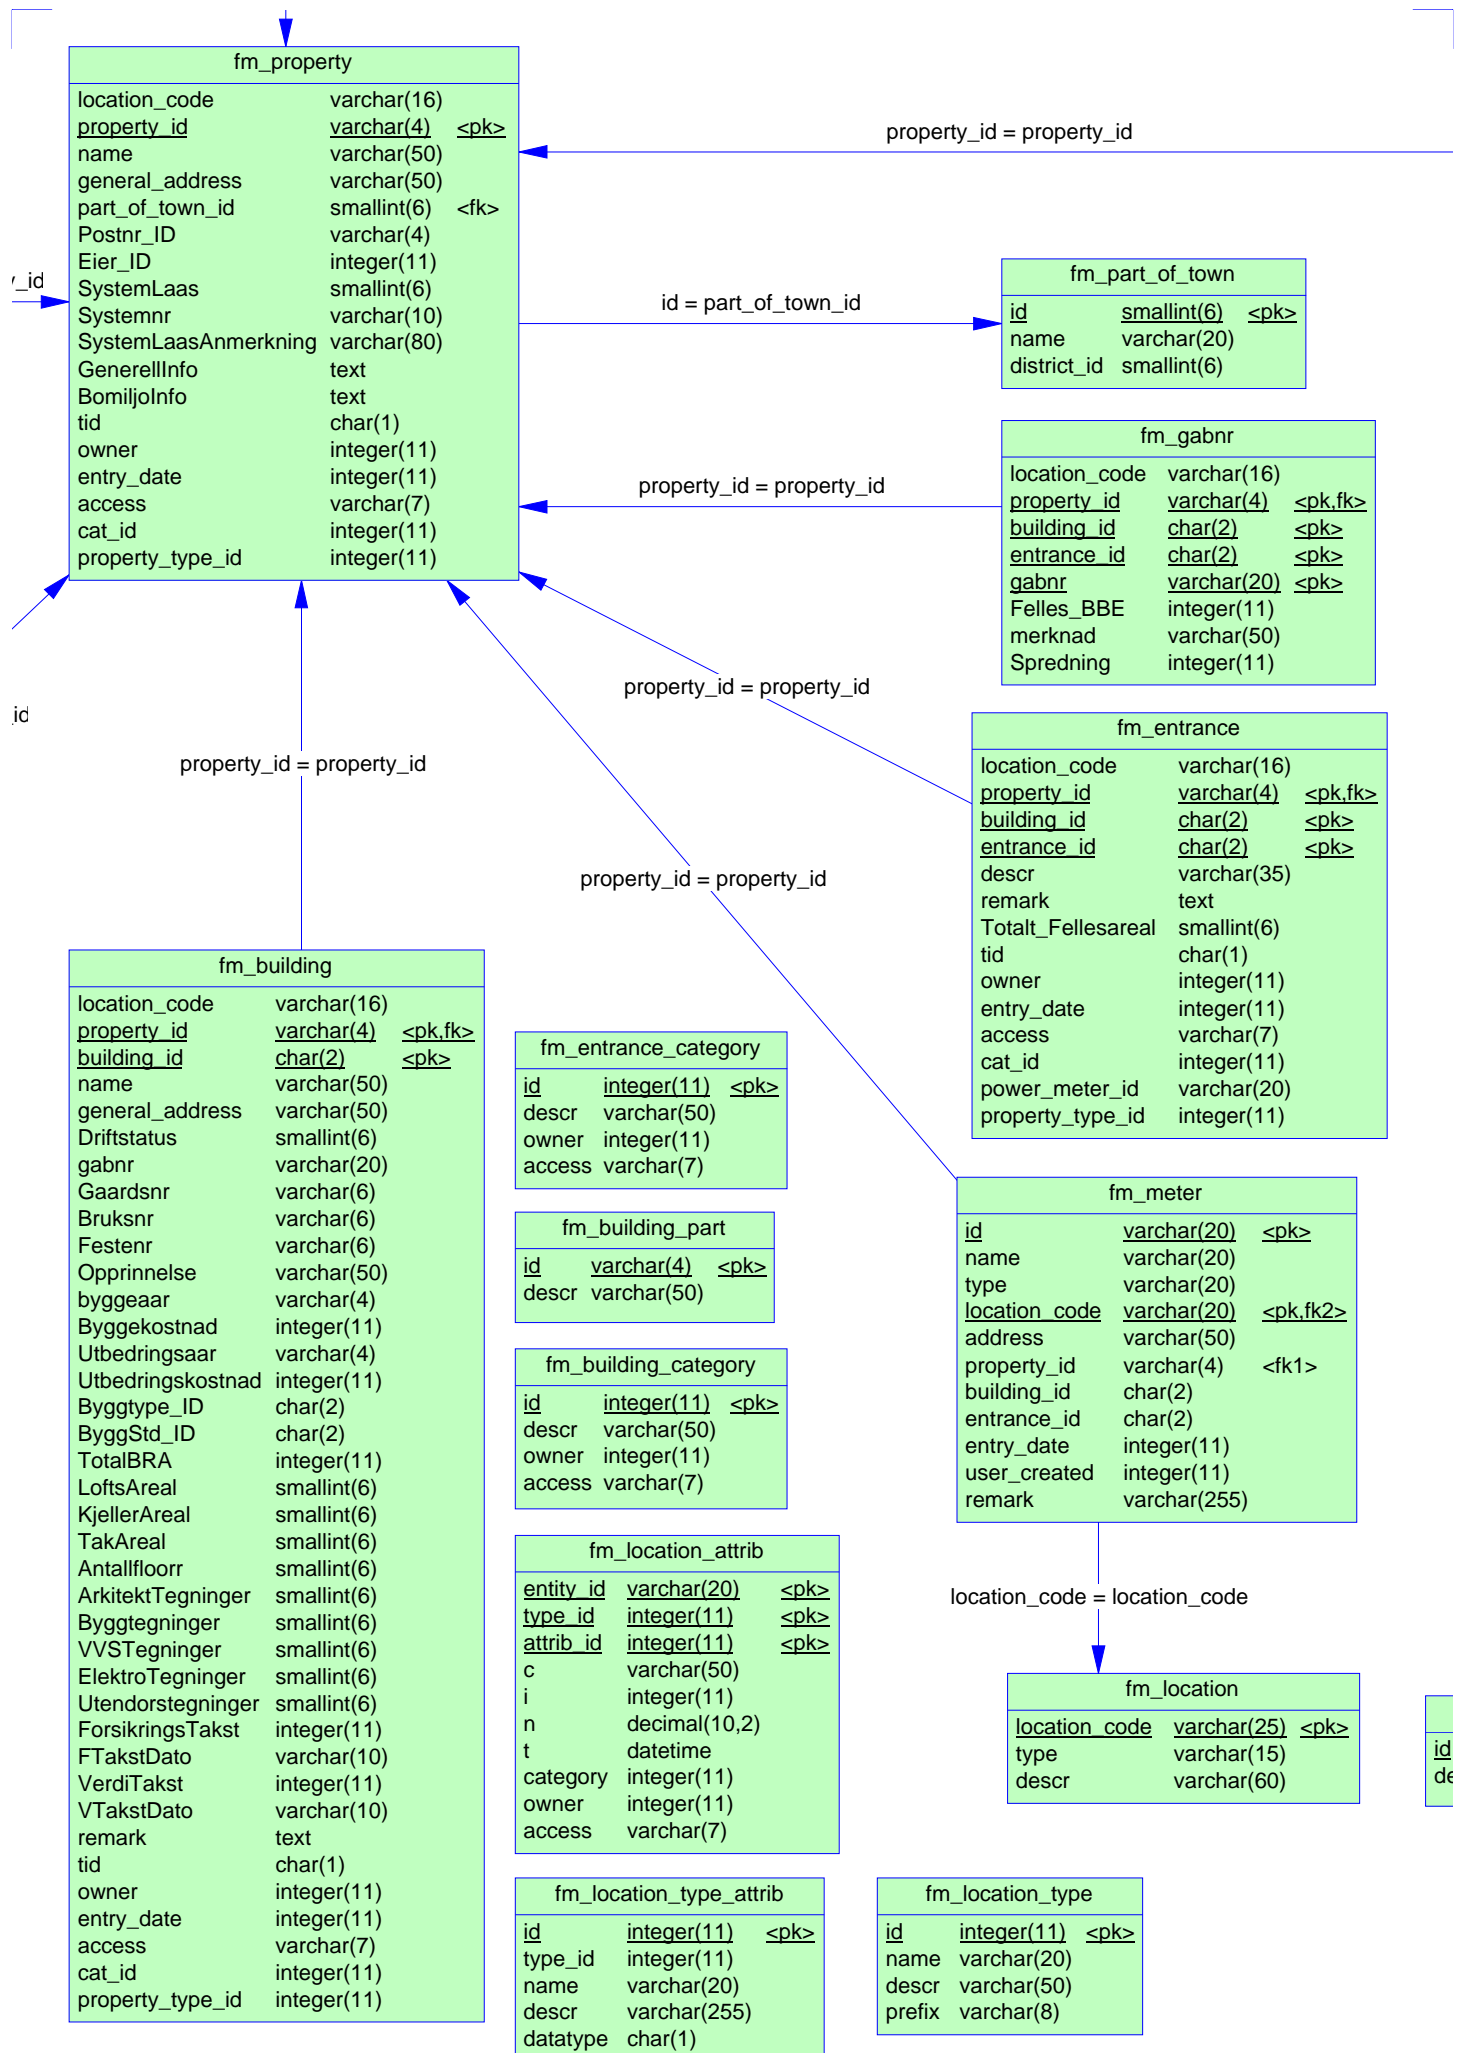

fm_apartment	
location_code	varchar(16)
<u>property_id</u>	<u>varchar(4)</u> <pk,fk1>
building_id	char(2)
entrance_id	char(2)
<u>apartment_id</u>	<u>char(3)</u> <pk>
floor	varchar(6)
street_id	integer(11) <fk3>
street_number	varchar(10)
descr	varchar(35)
remark	text
tenant_id	integer(11) <fk2>
Flyttenr	char(2)
Leieobjekttype_ID	char(1)
Kategori_ID	char(2)
AntallRom	smallint(6)
Boareal	integer(11)
AndelAvFellesareal	smallint(6)
Livslopsstd	smallint(6)
Heis	smallint(6)
Driftsstatus_ID	smallint(6)
FerdigDato	varchar(10)
LedigfraDato	varchar(10)
Ledigmeldingsstatus	smallint(6)
Ledigmeldingskommentar	varchar(80)
LedigmeldtDato	varchar(10)
AvhendetDato	varchar(10)
Husleiesaken	smallint(6)
Husleie	integer(11)
StromBrensel	integer(11)
Markedsleie	integer(11)
JustertMarkedsleie	integer(11)
IndeksDato	varchar(10)
NyHusleie	integer(11)
NyHusleieFraDato	varchar(10)
NyStromBrensel	integer(11)
NyStromBrenselFraDato	varchar(10)
Seksjonsnr	varchar(6)
Beregnet_BOA	smallint(6)
floor_beskrivelse	varchar(10)
ReturNklFraOppsynsmann	varchar(10)
Kategori	char(2)
DatoKPIregulert	varchar(10)
DatoGLregulert	varchar(10)
DatoUtsattGLregulering	varchar(10)
KPIPeriode	varchar(6)
GjengsLeie	integer(11)
Klage	smallint(6)
FemAarsKlausul	smallint(6)
DatoGLfastsatt	varchar(10)
PrisVarsling	smallint(6)
NyLeieSendtTilBOA	smallint(6)
tid	char(1)
owner	integer(11)
entry_date	integer(11)
access	varchar(7)
cat_id	integer(11) <fk4>
power_meter_id	varchar(20)
property_type_id	integer(11)

fm_tenant	
<u>tenant_id</u>	<u>integer(11)</u> <pk>
first_name	varchar(30)
last_name	varchar(30)
contact_phone	varchar(12)
Kjonn_Juridisk	smallint(6)
Flytte_ID	smallint(6)
Kontrakttype_ID	char(2)
KontraktFraDato	varchar(10)
KontraktTilDato	varchar(50)
Fornyelseskode	smallint(6)
Undernivaa	smallint(6)
Fornyelseskommentar	varchar(150)
AntallNklUtlevert	smallint(6)
AntallNklInnlevert	smallint(6)

fm_apartment_category	
<u>id</u>	<u>integer(11)</u> <pk>
descr	varchar(50)
owner	integer(11)
access	varchar(7)

fm_streetaddress	
<u>street_id</u>	<u>integer(11)</u> <pk>
street_name	char(50)

tenant_id = tenant_id

id = cat_id

street_id = street_id

fm_meter_category	
<u>varchar(20)</u>	<u><pk></u>
descr	varchar(255)

fm_wo_key_loc		
<u>id</u>	integer(11)	<pk>
num	varchar(20)	
descr	varchar(255)	

fm_wo_dim_d		
<u>id</u>	integer(11)	<pk>
descr	varchar(25)	

fm_wo_accounts		
<u>id</u>	integer(11)	<pk>
descr	varchar(25)	

addbook

phpgw_addbook_person_main
<u>id</u> integer(11) <pk>
title varchar(50)
last_name varchar(50)
middle varchar(50)
first_name varchar(50)
initials varchar(10)
birthday varchar(10)
gender varchar(20)
notes text
cat_id integer(11)

id = id

phpgw_addbook_address
<u>id</u> integer(11) <pk,fk1,fk2>
street varchar(50)
postal_code varchar(10)
po_box varchar(20)
city varchar(50)
state varchar(50)
country varchar(50)

id = id

phpgw_addbook_contacts
id integer(11)
contact_category_id integer(11)
contact varchar(100)

phpgw_addbook_ocontacts
<u>id</u> integer(11) <pk>
phone varchar(50)
fax varchar(50)
email varchar(50)
www varchar(50)
pref varchar(5)

phpgw_addbook_relation
<u>id</u> integer(11) <pk,fk>
job varchar(100)
org_link integer(11)

id = id

phpgw_addbook_meta
<u>id</u> integer(11) <fk1,fk2>
created datetime
owner integer(11)
modified datetime
modifier integer(11)
access varchar(7)
cat_id integer(11)
lid varchar(32)
tid char(1)

id = id

phpgw_addbook_org_main
<u>id</u> integer(11) <pk>
name varchar(100)
notes text
belongs_to_id integer(11)
cat_id integer(11)

phpgw_addbook_contact_cat
<u>contact_category_id</u> integer(11) <pk>
category_name varchar(50)

phpgw_addbook_pcontacts
<u>id</u> integer(11) <pk>
b_phone varchar(50)
p_phone varchar(50)
b_email varchar(50)
p_email varchar(50)
mobile varchar(50)
fax varchar(50)
pref varchar(8)

antispam

phpgw_antispam
username varchar(100)
preference varchar(30)
value varchar(100)
<u>prefid</u> integer(11) <pk>

stocks

phpgw_stocks
<u>stock_id</u> integer(11) <pk>
stock_owner integer(11)
stock_access varchar(7)
stock_name varchar(255)
stock_symbol varchar(255)
stock_country char(2)

notes

phpgw_notes
<u>note_id</u> integer(11) <pk>
note_owner integer(11)
note_access varchar(7)
note_date integer(11)
note_category integer(11)
note_content text

syncml-server

phpgw_syncml_device
<u>device_id</u> integer(11) <pk>
name varchar(15)
owner varchar(25)
server_last_sync varchar(15)
client_last_sync varchar(15)
capabilities varchar(255)

phpgw_syncml_luidmap
device_id integer(11)
guid varchar(16)
luid varchar(4)

phpgw_syncml_guidmap
<u>guid</u> varchar(16) <pk>
appname char(1)
record_id integer(11)
record_status char(1)

registration

phpgw_reg_fields
field_name varchar(255)
field_text text
field_type varchar(255)
field_values text
field_required char(1)
field_order integer(11)

phpgw_reg_accounts
reg_id varchar(32)
reg_lid varchar(255)
reg_info text
reg_dla integer(11)

brewer

phpgw_brewer_recipes

<u>id</u>	<u>integer(11)</u> <pk>
name	varchar(64)
style	integer(11)
total_vol	decimal(4,2)
vol_units	varchar(16)
boil_vol	decimal(4,2)
boil_units	varchar(16)
boil_time	integer(11)
yeasts	varchar(255)
num_yeasts	integer(11)
yeast_amounts	varchar(255)
yeast_units	varchar(16)
malts	varchar(255)
num_malts	integer(11)
malt_amounts	varchar(255)
malt_colors	varchar(255)
malt_gravities	varchar(255)
malt_units	varchar(255)
hops	varchar(255)
num_hops	integer(11)
hop_amounts	varchar(255)
hop_times	varchar(255)
hop_IBUs	varchar(255)
hop_units	varchar(255)
hop_bag	char(1)
IBU_method	varchar(32)
extraction_efficiency	decimal(4,2)
apparent_attenuation	decimal(4,2)
real_attenuation	decimal(4,2)
original_gravity	decimal(5,3)
final_gravity	decimal(5,3)
alcohol_by_volume	decimal(5,2)
color	varchar(32)
IBUs	varchar(255)

phpgw_brewer_styles

<u>id</u>	<u>integer(11)</u> <pk>
name	varchar(64)
stock	char(1)
description	text
ingredients	varchar(255)
mingravity	decimal(5,3)
maxgravity	decimal(5,3)
minalcohol	decimal(5,2)
maxalcohol	decimal(5,2)
mincolor	decimal(5,2)
maxcolor	decimal(5,2)
minbitter	decimal(5,2)
maxbitter	decimal(5,2)

phpgw_brewer_malts

<u>id</u>	<u>integer(11)</u> <pk>
name	varchar(64)
gravity	decimal(5,3)
avg_color	decimal(5,2)
starch_conv	smallint(6)
description	varchar(255)

phpgw_brewer_yeasts

<u>id</u>	<u>integer(11)</u> <pk>
name	varchar(64)
avgatten	decimal(4,2)
flocrate	smallint(6)
description	varchar(255)

phpgw_brewer_hops

<u>id</u>	<u>integer(11)</u> <pk>
name	varchar(64)
avg_alpha	decimal(4,2)
avg_iols	decimal(4,2)
description	varchar(255)

chora

phpgw_chora_sites

<u>id</u>	<u>integer(11)</u> <pk>
name	varchar(32)
location	varchar(64)
title	varchar(32)
intro	varchar(32)
cvsusers	varchar(64)
is_default	smallint(6)

headlines

phpgw_headlines_sites

<u>con</u>	<u>integer(11)</u> <pk>
display	varchar(255)
base_url	varchar(255)
newsfile	varchar(255)
lastread	integer(11)
newstype	varchar(15)
cachetime	integer(11)
listings	integer(11)

phpgw_headlines_cached

site	integer(11)
title	varchar(255)
link	varchar(255)

chat

phpgw_chat_privatechat

<u>con</u>	<u>integer(11)</u> <pk>
user1	varchar(25)
user2	varchar(25)
sentby	varchar(25)
message	text
messagetype	integer(11)
timesent	integer(11)
closed	integer(11)

phpgw_chat_messages

<u>con</u>	<u>integer(11)</u> <pk>
channel	varchar(20)
loginid	varchar(25)
message	text
messagetype	integer(11)
timesent	integer(11)

phpgw_chat_currentin

<u>con</u>	<u>integer(11)</u> <pk>
loginid	varchar(25)
channel	varchar(20)
lastmessage	integer(11)

phpgw_chat_channel

<u>con</u>	<u>integer(11)</u> <pk>
name	varchar(10)
title	varchar(50)

news_admin

phpgw_news

<u>news_id</u>	<u>integer(11)</u> <pk>
news_date	integer(11)
news_subject	varchar(255)
news_submittedby	varchar(255) <fk>
news_content	blob
news_status	varchar(16)
news_cat	integer(11)

napster

phpgw_napster_servers

<u>name</u>	<u>varchar(255)</u> <pk>
ip	varchar(255)
port	integer(11)
network	varchar(255)
users	integer(11)
files	integer(11)
gb	integer(11)
lastupdated	integer(11)

phpgw_napster_ports

<u>port</u>	<u>integer(11)</u> <pk>
state	integer(11)

phpgw_napster_speeds

<u>speed</u>	<u>varchar(255)</u> <pk>
--------------	--------------------------

phpgw_napster_compares

<u>operator</u>	<u>varchar(255)</u> <pk>
-----------------	--------------------------

sitemgr

phpgw_sitemgr_content		
<u>block_id</u>	integer(11)	<pk>
area	varchar(50)	
cat_id	integer(11)	
page_id	integer(11)	
module_id	integer(11)	<fk>
arguments	text	
sort_order	integer(11)	
viewable	integer(11)	
actif	smallint(6)	

phpgw_sitemgr_content_lang		
<u>block_id</u>	integer(11)	<pk,fk>
<u>lang</u>	char(2)	<pk>
arguments_lang	text	
title	varchar(255)	

block_id = block_id

phpgw_sitemgr_pages		
<u>page_id</u>	integer(11)	<pk>
cat_id	integer(11)	
sort_order	integer(11)	
hide_page	integer(11)	
name	varchar(100)	

phpgw_sitemgr_categories_lang		
<u>cat_id</u>	integer(11)	<pk>
<u>lang</u>	char(2)	<pk>
name	varchar(100)	
description	varchar(255)	

module_id = module_id

phpgw_sitemgr_modules		
<u>module_id</u>	integer(11)	<pk>
module_name	varchar(25)	
description	varchar(255)	

phpgw_sitemgr_active_modules		
area	varchar(50)	<pk>
<u>cat_id</u>	integer(11)	<pk>
<u>module_id</u>	integer(11)	<pk,fk>

module_id = module_id

module_id = module_id

phpgw_sitemgr_properties		
area	varchar(50)	<pk>
<u>cat_id</u>	integer(11)	<pk>
<u>module_id</u>	integer(11)	<pk,fk>
properties	text	

phpgw_sitemgr_pages_lang		
<u>page_id</u>	integer(11)	<pk>
<u>lang</u>	char(2)	<pk>
title	varchar(255)	
subtitle	varchar(255)	

phpgw_sitemgr_preferences		
<u>pref_id</u>	integer(11)	<pk>
name	varchar(255)	
value	text	

